


# DS-7204/7208/7216HFI-ST Standalone DVR



DS-7208/7216HFI-ST



DS-7204HFI-ST

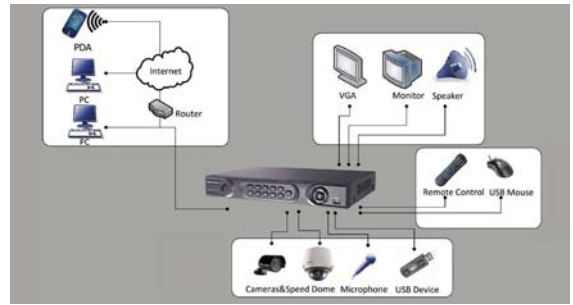

## Key features

- H.264 video compression
- 4CIF resolution real-time recording
- VGA output at up to 1280×1024 resolution
- HDMI output optional(DS-7208/16HFI-ST)
- Dual-stream
- 4/8/16-ch synchronous playback
- SMTP, NTP, SADP(IP Finder), DHCP protocols

## Rear Panel of DS-7216HFI-ST



1. Main/spot video out
2. Video in
3. Audio in
4. Line in
5. Audio out
6. VGA interface
7. RS-232 serial interface
8. LAN
9. USB interface
10. RS-485 interface
11. Alarm in, alarm out
12. 12 VDC power supply interface
13. Power switch
14. GND

## Specifications

	DS-7204HFI-ST	DS-7208HFI-ST	DS-7216HFI-ST
<b>Video / Audio input</b>			
Video compression	H.264		
Analog video input	4-ch	8-ch	16-ch
Video input interface	BNC connector (1.0 Vp-p, 75 Ω); PAL / NTSC self-adaptive		
Audio compression	G.711		
Audio input	4-ch, RCA connector (2.0 Vp-p, 1 kΩ)		
Voice talk input	1-ch, RCA (2.0 Vp-p, 1 kΩ)		
<b>Video / Audio output</b>			
VGA output	1-ch, resolution: 1280 × 1024 / 60 Hz, 1024 × 768 / 60 Hz		
CVBS output	2-ch, BNC connector (1.0 Vp-p, 75 Ω); Resolution: PAL: 704 × 576, NTSC: 704 × 480		
Audio output	1-ch, RCA connector (linear, 1 kΩ)		
Recording resolution	4CIF / 2CIF / CIF		
Frame rate	Main stream: 4CIF / 2CIF / CIF@25 fps (P) / 30 fps (N) Sub stream: CIF / QCIF		
Video bit rate	32 kbps ~ 2048 kbps, or user defined (max. 3072 kbps)		
Stream type	Video, Video & Audio		
Audio bit rate	64 kbps		
Dual-stream	Support		
Synchronous playback	4-ch	8-ch	16-ch
<b>Hard disk</b>			
SATA	1 SATA interface	2 SATA interfaces	2 SATA interfaces
Capacity	Up to 2TB capacity for each disk		
<b>External interface</b>			
Network interface	1, RJ45 10M / 100M self-adaptive ethernet interface		
Serial interface	1 RS-485 full-duplex interface, 1 RS-232 interface		
USB interface	2, USB 2.0		
Alarm in	4	8	16
Alarm out	1	4	4
<b>General</b>			
Power supply	12 VDC		
Consumption	≤ 10W (without hard disk or DVD-R/W)	≤ 10W (without hard disk or DVD-R/W)	≤ 15W (without hard disk or DVD-R/W)
Working temperature	-10 °C ~ +55 °C		
Working humidity	10% ~ 90%		
Chassis	Stand-alone 1U chassis	19-inch standard rack-mounted 1U chassis	19-inch standard rack-mounted 1U chassis
Dimensions (W x D x H)	315 × 230 × 45 mm	445 × 290 × 45 mm	445 × 290 × 45 mm
Weight	≤ 2kg (without hard disk or DVD-R/W)	≤ 4kg (without hard disk or DVD-R/W)	≤ 4kg (without hard disk or DVD-R/W)